


Galvanized Rigid Conduit (GRC) Couplings & Elbows

Galvanized Rigid Conduit (GRC) Couplings

Listed to Underwriters Laboratories Safety Standard UL 6
Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Nominal O.D. (A) ²		Length (B) ¹		Threads Per Inch ¹	Approximate Weight Per 100 Pieces		Standard Package
		in.	mm.	in.	mm.		lb.	kg.	
1/2	16	1.01	25.7	1 5/8	41.3	14	12	5.4	100
3/4	21	1.25	31.8	1 41/64	41.7	14	18	8.2	50
1	27	1.53	38.7	1 31/32	50.0	11 1/2	30	13.6	30
1 1/4	35	1.87	47.5	2 1/32	51.6	11 1/2	37	16.8	25
1 1/2	41	2.16	54.7	2 1/16	52.4	11 1/2	52	23.6	25
2	53	2.65	67.3	2 1/8	54.0	11 1/2	72	32.7	20
2 1/2	63	3.25	82.6	3 3/16	81.0	8	170	77.1	1
3	78	3.87	98.3	3 5/16	84.1	8	210	95.3	1
3 1/2	91	4.50	114.3	3 13/32	86.5	8	340	154.2	1
4	103	4.88	123.8	3 33/64	89.3	8	300	136.1	1
5	129	6.00	152.4	3 61/64	100.4	8	475	215.5	1
6	155	7.20	182.9	4 1/4	108.0	8	765	347.0	1




¹Minimum requirement as per UL Standard

Super Kwik-Coupling[®]

Listed to Underwriters Laboratories Safety Standard UL 514B
Manufactured in accordance with ANSI C22.2 No. 18.3-12



Trade Size	Metric Designator	Nominal O.D. (A)		Length (B)		Threads Per Inch ¹	Approximate Weight Per 100 Pieces		Standard Package
		in.	mm.	in.	mm.		lb.	kg.	
2 1/2	63	3.45	87.6	3.19	81.0	8	170	76.5	2
3	78	4.08	103.6	3.31	84.1	8	210	94.5	1
3 1/2	91	4.59	116.6	4.15	105.4	8	270	121.5	1
4	103	5.24	133.1	4	101.6	8	370	166.5	1



¹Minimum requirement as per UL Standard

SUPER KWIK-COUPLE™ ELBOWS AVAILABLE


Trade Size 2 1/2 to 4 by special order
• Single & Double Sided

Galvanized Rigid Conduit (GRC) 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 6
Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces		Standard Package
		in.	mm.	in.	mm.	in.	mm.	lb.	kg.	
1/2	16	4	102	5 7/8	149	1 1/2	38	68	30.8	50
3/4	21	4 1/2	114	7	178	1 1/2	38	109	49.4	50
1	27	5 3/4	146	8 3/4	222	1 7/8	48	201	91.2	25
1 1/4	35	7 1/4	184	10 3/4	273	2	51	336	152.4	20
1 1/2	41	8 1/4	210	12 1/4	311	2	51	460	208.7	15
2	53	9 1/2	241	14 1/2	368	2	51	729	330.7	10
2 1/2	63	10 1/2	267	17	432	3	76	1374	623.2	1
3	78	13	330	19 3/8	498	3 1/8	79	2045	927.6	1
3 1/2	91	15	381	22 3/4	578	3 1/4	83	2860	1297.3	1
4	103	16	406	23 7/8	606	3 3/8	86	3519	1596.2	1
5	129	24	610	34 7/8	886	3 3/8	92	6942	3148.9	1
6	155	30	762	45 1/2	1156	3 3/4	95	11960	5425.1	1



¹Minimum requirement as per UL Standard

²For information only, not a requirement as per UL Standard

Sizes 2 1/2 (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (60°, 45°, 30°, 22 1/2°, 15° & 11 1/2°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

alliedeg.com

Galvanized Rigid Conduit (GRC) Couplings & Elbows

Galvanized Rigid Conduit (GRC) 90°


Super Kwik-Couple™ Elbow

Listed to Underwriters Laboratories Safety Standard UL 514B

Manufactured in accordance with ANSI C22.2 No. 18.3-12



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Straight (D) ²		Straight (E) ²		Approximate Weight Per 100 Pieces		Standard Package
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	kg.	
2 ½	63	10 ½	267	17	432	3	76	4 ½	114	695	1	2
3	78	13	330	19 ⅝	498	3 ⅛	79	4 ¾	121	1015	1	1
3 ½	91	15	381	22 ¾	578	3 ¼	83	5 ⅝	137	1409	1	1
4	103	16	406	23 ⅞	606	3 ⅜	86	5 ⅜	137	1750	1	1



¹Minimum requirement as per UL Standard

²For information only, not a requirement as per UL Standard

Sizes 2 ½ (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (60°, 45°, 30°, 22 ½°, 15° & 11 ¼°)

SUPER KWIK-COUPLE™ ELBOWS AVAILABLE

Trade Size 2 ½ to 4 by special order

- Single & Double Sided


Galvanized Rigid Conduit (GRC) 45° Elbows

Listed to Underwriters Laboratories Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Offset (C) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces		Standard Package
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	kg.	
½	16	4	102	7	178	2 ⅞	73	1 ½	38	55	24.9	50
¾	21	4 ½	114	7 ⅞	200	3 ¼	83	1 ½	38	82	37.2	50
1	27	5 ¾	146	9 ⅝	244	4	102	1 ⅞	48	148	67.1	25
1 ¼	35	7 ¼	184	11 ⅞	283	4 ⅝	117	2	51	232	105.2	20
1 ½	41	8 ¼	210	13 ⅞	333	5 ⅜	137	2	51	329	149.2	15
2	53	9 ½	241	15 ¾	400	6 ½	165	2	51	525	238.1	10
2 ½	63	10 ½	267	17 ½	445	7 ¼	184	3	76	932	422.8	1
3	78	13	330	21 ⅞	556	9	229	3 ⅞	79	1515	687.2	1
3 ½	91	15	381	26 ⅞	664	10 ⅞	276	3 ¼	83	2200	997.9	1
4	103	16	406	26 ¼	667	10 ⅞	276	3 ⅜	86	2575	1168.0	1
5	129	24	610	35 ⅞	911	14 ⅞	378	3 ⅜	92	4783	2169.6	1
6	155	30	762	43 ⅞	1102	18	457	3 ¾	95	7590	3442.8	1

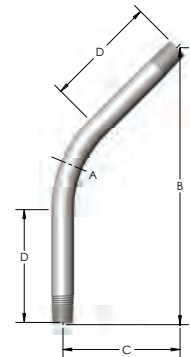

¹Minimum requirement as per UL Standard

²For information only, not a requirement as per UL Standard

Sizes 2 ½ (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (90°, 60°, 30°, 22 ½°, 15° & 11 ¼°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

800.882.5543

Galvanized Rigid Conduit (GRC) Couplings & Nipples


Galvanized Rigid Conduit (GRC) Large Radius 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces	
		in.	mm.	in.	mm.	in.	mm.	lb.	kg.
1	27	18	457	27 7/8	708	9 7/8	251	644	292.1
1	27	24	610	34 5/8	879	10 5/8	270	792	359.3
1	27	30	762	41	1041	11	279	926	420.0
1	27	36	914	46 3/4	1187	10 3/4	273	1047	474.9
1	27	48	1219	61 1/4	1556	13 1/4	337	1369	621.0
1 1/4	35	18	457	27 7/8	708	9 7/8	251	872	395.5
1 1/4	35	24	610	34 5/8	879	10 5/8	270	1072	486.3
1 1/4	35	30	762	41	1041	11	279	1254	568.8
1 1/4	35	36	914	46 3/4	1187	10 3/4	273	1417	642.8
1 1/4	35	48	1219	61 1/4	1556	13 1/4	337	1853	840.5
1 1/2	41	18	457	27 7/8	708	9 7/8	251	1052	477.2
1 1/2	41	24	610	34 5/8	879	10 5/8	270	1293	586.5
1 1/2	41	30	762	41	1041	11	279	1512	685.8
1 1/2	41	36	914	46 3/4	1187	10 3/4	273	1710	775.7
1 1/2	41	48	1219	61 1/4	1556	13 1/4	337	2236	1014.2
2	53	18	457	27 7/8	708	9 7/8	251	1400	635.0
2	53	24	610	30 3/8	772	6 3/8	162	1473	668.2
2	53	30	762	41	1041	11	279	2013	913.1
2	53	36	914	46 3/4	1187	10 3/4	273	2275	1031.9
2	53	48	1219	61 1/4	1556	13 1/4	337	2975	1349.5
2 1/2	63	18	457	24 3/8	619	6 3/8	162	1910	866.4
2 1/2	63	24	610	31 1/8	791	7 1/8	181	2422	1098.6
2 1/2	63	30	762	37 1/2	953	7 1/2	191	2888	1310.0
2 1/2	63	36	914	44 3/4	1137	8 3/4	222	3447	1563.6
2 1/2	63	48	1219	61 1/4	1556	13 1/4	337	4752	2155.5
3	78	18	457	24 3/8	619	6 3/8	162	2484	1126.7
3	78	24	610	33 1/8	841	9 1/8	232	3393	1539.1
3	78	30	762	38 5/8	981	8 5/8	219	3892	1765.4
3	78	36	914	46 7/8	1191	10 7/8	276	4741	2150.5
3	78	48	1219	60 1/4	1530	12 1/4	311	6058	2747.9
3	78	60	1524	75 7/8	1927	15 7/8	403	7634	3462.8
3 1/2	91	24	610	35 1/8	892	11 1/8	283	4400	1995.8
3 1/2	91	30	762	38 1/2	978	8 1/2	216	4693	2128.7
3 1/2	91	36	914	47	1194	11	279	5757	2611.4
3 1/2	91	48	1219	60 1/4	1530	12 1/4	311	7333	3326.2
4	103	24	610	35 1/8	892	11 1/8	283	5150	2336.0
4	103	30	762	39 3/8	1000	9 3/8	238	5644	2560.1
4	103	36	914	47	1194	11	279	6738	3056.4
4	103	48	1219	60 1/4	1530	12 1/4	311	8583	3893.2
4	103	60	1524	75 7/8	1927	15 7/8	403	10815	4905.7



¹For information only, not a requirement as per UL Standard

Shipped in palletized cartons or bulk.

Also available in the following Degrees (60°, 30°, 22 1/2°, 15° & 11 1/4°)

Chart continued on next page

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

Galvanized Rigid Conduit (GRC) Couplings & Elbows


Galvanized Rigid Conduit (GRC) Large Radius 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces	
		in.	mm.	in.	mm.	in.	mm.	lb.	kg.
5	129	36	914	50 3/4	1289	14 3/4	375	10033	4551.0
5	129	48	1219	65 1/4	1657	17 1/4	438	12833	5821.0
5	129	60	1524	75 7/8	1927	15 7/8	403	14700	6667.9
6	155	36	914	50 3/4	1289	14 3/4	375	13187	5981.6
6	155	48	1219	65 1/4	1657	17 1/4	438	16867	7650.9
6	155	60	1524	75 7/8	1927	15 7/8	403	19320	8763.6



¹For information only, not a requirement as per UL Standard

Shipped in palletized cartons or bulk.

Also available in the following Degrees (60°, 45°, 30°, 22 1/2°, 15° & 11 1/4°)


Galvanized Rigid Conduit (GRC) Large Radius 45° Elbows

Listed to Underwriters Laboratories Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Offset (C) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	kg.
1	27	18	457	30	762	12 1/2	318	11	279	420	189
1	27	24	610	36	914	15	381	11	279	640	288
1	27	30	762	40	1016	17	432	11	279	700	315
1	27	36	914	44	1118	18 1/2	470	11	279	620	279
1	27	48	1219	54 1/2	1384	22 1/2	572	12	305	830	374
1 1/4	35	18	457	30	762	12 1/2	318	11	279	610	275
1 1/4	35	24	610	36	914	15	381	11	279	800	360
1 1/4	35	30	762	40	1016	17	432	11	279	900	405
1 1/4	35	36	914	44	1118	18 1/2	470	11	279	900	405
1 1/4	35	48	1219	54 1/2	1384	22 1/2	572	12	305	1130	509
1 1/2	41	18	457	30	762	12 1/2	318	11	279	800	360
1 1/2	41	24	610	36	914	15	381	11	279	920	414
1 1/2	41	30	762	40	1016	17	432	11	279	960	432
1 1/2	41	36	914	44	1118	18 1/2	470	11	279	1100	495
1 1/2	41	48	1219	54 1/2	1384	22 1/2	572	12	305	1360	612
2	53	18	457	30	762	12 1/2	318	11	279	1000	450
2	53	24	610	36	914	15	381	11	279	1200	540
2	53	30	762	40	1016	17	432	11	279	1400	630
2	53	36	914	44	1118	18 1/2	470	11	279	1400	630
2	53	48	1219	54 1/2	1384	22 1/2	572	12	305	1810	815
2 1/2	63	18	457	30	762	12 1/2	318	11	279	1500	675
2 1/2	63	24	610	36	914	15	381	11	279	1500	675
2 1/2	63	30	762	40	1016	17	432	11	279	2200	990
2 1/2	63	36	914	44	1118	18 1/2	470	11	279	2200	990
2 1/2	63	48	1219	54 1/2	1384	22 1/2	572	12	305	2890	1301

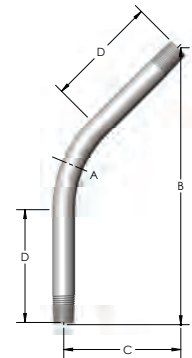

¹Minimum requirement as per UL Standard

²For information only, not a requirement as per UL Standard

Sizes 2 1/2 (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (90°, 60°, 30°, 22 1/2°, 15° & 11 1/4°)

Chart continued on next page

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

800.882.5543

Galvanized Rigid Conduit (GRC) Elbows & Nipples


Galvanized Rigid Conduit (GRC) Large Radius 45° Elbows

Listed to Underwriters Laboratories Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Offset (C) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	kg.
3	78	18	457	30	762	12 ½	318	11	279	2000	900
3	78	24	610	36	914	15	381	11	279	2500	1125
3	78	30	762	40	1016	17	432	11	279	2700	1215
3	78	36	914	44	1118	18 ½	470	11	279	2900	1305
3	78	48	1219	54 ½	1384	22 ½	572	12	305	3880	1746
3 ½	91	24	610	36	914	15	381	11	279	2860	1287
3 ½	91	30	762	40	1016	17	432	11	279	2930	1319
3 ½	91	36	914	44	1118	18 ½	470	11	279	3500	1575
3 ½	91	48	1219	54 ½	1384	22 ½	572	12	305	4550	2048
4	103	24	610	36	914	15	381	11	279	3400	1530
4	103	30	762	40	1016	17	432	11	279	4100	1845
4	103	36	914	44	1118	18 ½	470	11	279	4200	1890
4	103	48	1219	54 ½	1384	22 ½	572	12	305	5320	2394
4	103	60	1524	62	1575	26	660	12	305	6090	2741
5	129	36	914	44	1118	18 ½	470	11	279	6000	2700
5	129	48	1219	54 ½	1384	22 ½	572	12	305	7230	3254
5	129	60	1524	62	1575	26	660	12	305	8280	3726
6	155	36	914	44	1118	18 ½	470	12	305	8100	3645
6	155	48	1219	54 ½	1384	22 ½	572	12	305	9300	4185
6	155	60	1524	62	1575	26	660	12	305	10650	4793

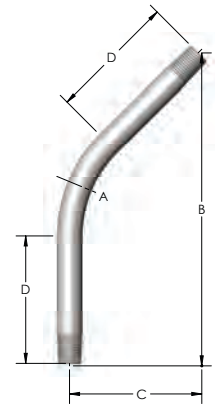

¹Minimum requirement as per UL Standard

²For information only, not a requirement as per UL Standard

Sizes 2 ½ (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (90°, 60°, 30°, 22 ½°, 15° & 11 ¼°)


Galvanized Rigid Conduit (GRC) Nipples

Listed to UL Safety Standard 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Length (A)		Total Thread Length (B) ¹		Threads Per Inch ¹	Approximate Weight Per 100 Pieces		Standard Package
		in.	mm.	in.	mm.		lb.	kg.	
½	16	(Close) 1 ½	29	0.78	19.8	14	6	2.7	25
½	16	1 ½	38	0.78	19.8	14	8	3.6	25
½	16	2	51	0.78	19.8	14	12	5.4	25
½	16	2 ½	64	0.78	19.8	14	15	6.8	25
½	16	3	76	0.78	19.8	14	19	8.6	25
½	16	3 ½	89	0.78	19.8	14	22	10.0	25
½	16	4	102	0.78	19.8	14	26	11.8	25
½	16	5	127	0.78	19.8	14	33	15.0	25
½	16	6	152	0.78	19.8	14	40	18.1	25
½	16	8	203	0.78	19.8	14	54	24.5	25
½	16	10	254	0.78	19.8	14	68	30.8	25
½	16	12	305	0.78	19.8	14	82	37.2	25



¹Minimum requirement as per UL Standard

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.